




VENUS

Downlight

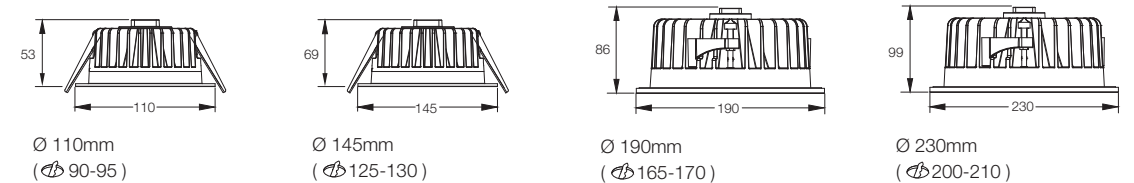

	Ø 110mm (Φ 90-95)	Ø 145mm (Φ 125-130)	Ø 190mm (Φ 165-170)	Ø 230mm (Φ 200-210)
Power	7W 9W 12W 15W	9W 12W 15W 20W	12W 15W 20W 30W	20W 30W 40W
Lumen Output	611lm 755lm 944lm 1170lm	793lm 1108lm 1267lm 2012lm	1162lm 1375lm 1728lm 2161lm	1860lm 2270lm 2982lm
Beam Angles	90°	90°	90°	90°
Colour Temperature	2700K 3000K 4000K 5000K	2700K 3000K 4000K 5000K	2700K 3000K 4000K 5000K	2700K 3000K 4000K 5000K
CRI	82+ 92+	82+ 92+	82+ 92+	82+ 92+

Finishes

UV Textured White

IP 20

3yr Warranty

Dimmable



General Specifications

Material | Powder Coated Aluminium

Lifetime | >60,000h L70

Colour Deviation | SDCM≤3

Different dimming

Excellent thermal management

Driver

Power Factor | >0.90

240V Remote PC Dimmable Driver

Dimming Type | DALI, TRIAC, 1-10V

Notes

- Different wattage can be provided upon request
- Customization for non-standard solutions in terms of light source, color, length and other specifications.

VENUS Downlight

The luminaire impresses by an attractive but simple design and easy installation.

The anti-dazzle design offers a comfortable and desirable lighting environment.

The applications range from commercial, retail and hospitality to residential installation.